

M12 MALE Y-DISTR. 0° WIREABLE SCREW TERM.

4-pol. max.0,75mm²

Male straight

Y-connector M12, 4-pole

Screw terminals

Sealing range (cable Ø): 2.1...3/4...5 mm



Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

stay connected

Male

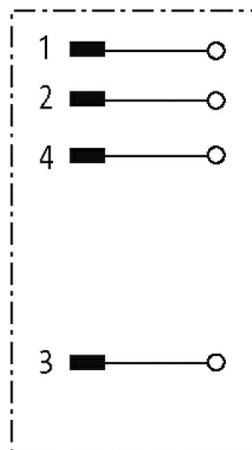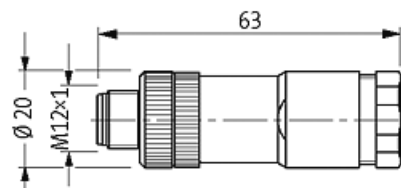

Product may differ from Image

Form

Form 12781

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Sealing range (cable Ø)	2.1...3/4...5 mm (2 cable entries)
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range	-40...+85 °C
Dimensions H×W×D	63×20×20 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879201629
eClass	27279221
Packaging unit	1