

T coupler M12 male / M12 female

T-coupler

Male straight – females straight

M12 – M12

5-pole

Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


[Link to Product](#)

Illustration



Product may differ from Image

Approvals



Form

Form 41 121

General data

Pollution Degree 3
Temperature range -25...+85 °C


Technical Data

Operating voltage max. 60 V AC/DC
Operating voltage (only UL listed) 30 V AC/DC
Rated surge voltage 1.5 kV
Operating current per contact max. 4 A
Material group IEC 60664-1, category I
Locking of ports Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection IP67 inserted and tightened (EN 60529)
Locking material Zinc die casting, matte nickel plated

Commercial data

country of origin DE
customs tariff number 85366990
EAN 4048879144872
eClass 27143423
Packaging unit 1

Sketch

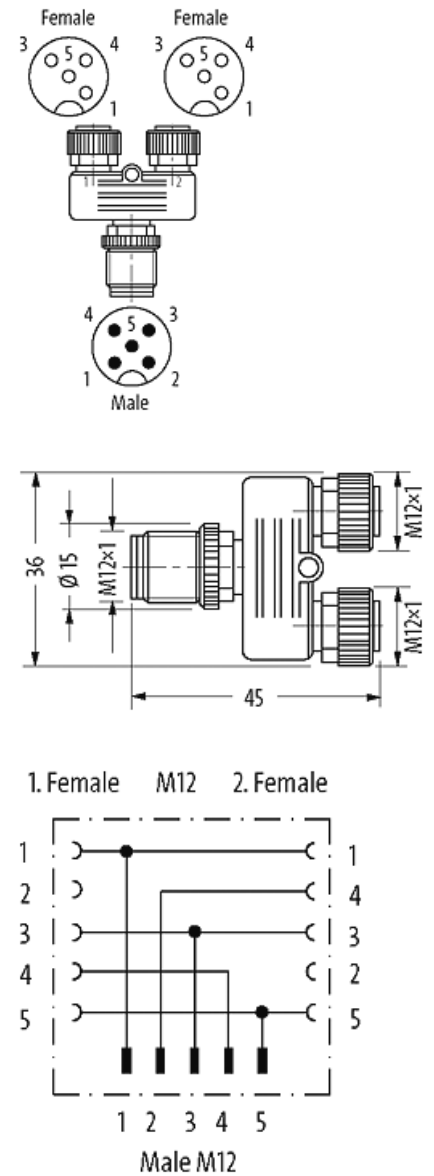

Product may differ from Image