


# E11508



## Female wirable connectors

SDOGH040MSSFKPG

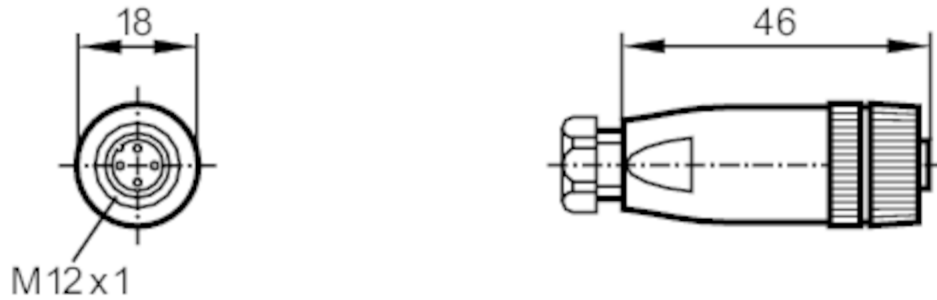

### Application

Free from silicone yes

### Electrical data

Operating voltage [V] < 45 AC / < 70 DC

Max. current load total [A] 4; (...40 °C)

### Operating conditions

Ambient temperature [°C] -25...85

Protection IP 68

### Mechanical data

Weight [g] 28.1

Dimensions [mm] 18 x 18 x 46

Material PA

Material nut brass, nickel-plated

### Remarks

Pack quantity 1 pcs.

### Electrical connection

screw terminals: ...0.75 mm<sup>2</sup>; Cable sheath: Ø 4...6 mm

### Electrical connection - Socket


Connector: 1 x M12, straight; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated

# E11508



## Female wirable connectors

SDOGH040MSSFKPG



### Connection

